

# Bulletin 1492-SP




Supplementary Protectors - UL 1077/CSA 22.2 No. 235  
Miniature Circuit Breakers - IEC/EN 60 898, 60 947-2, & CCC GB 10963

## Advantages

- Flexibility
  - Available in a wide range of currents and trip characteristics to meet application protection needs
- Available bus bars
  - IEC versions
  - UL, CSA, CE certified
  - 80 A and 100 A ampacity
- Energy-limiting capability
  - Provides ten to twenty times less "let-through" energy than conventional circuit breakers, resulting in diminished wire heating and minimized damage to downstream components
- Space-saving design
  - Requires less panel space
    - Height is 80 mm
    - Auxiliary and signal contact only 9 mm wide
- Simplified maintenance
  - Red/green flags and toggle position identify localized fault to simplifying troubleshooting
- Global product offering
  - Meets US, Canadian, Chinese, and IEC/EN standards
  - Designed for worldwide applications

*Available bus bar options bring this line to a new level of flexibility and simplicity*

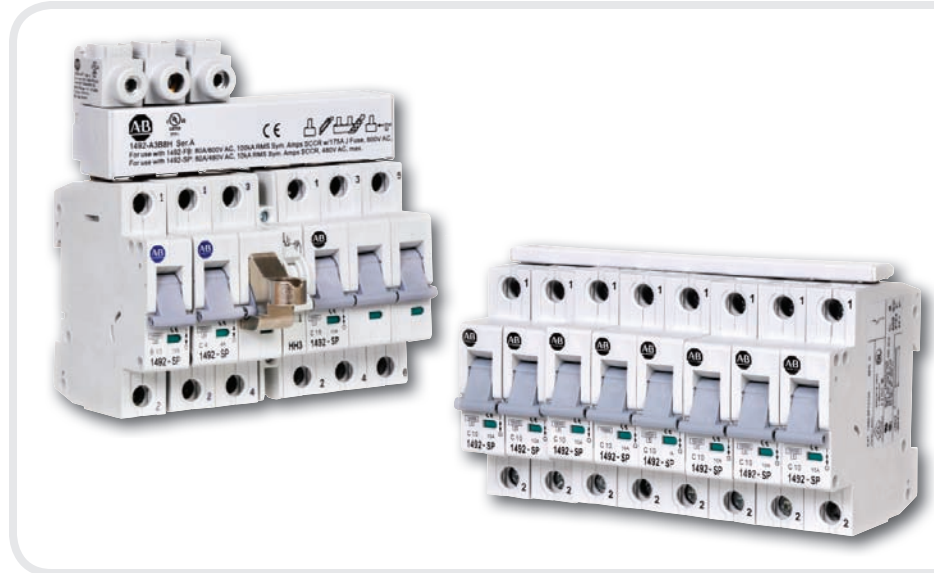

## Overview

The Allen-Bradley® Bulletin 1492-SP products from Rockwell Automation are energy limiting supplementary protectors/miniature circuit breakers. In case of a short circuit or thermal overload, these devices are designed to protect equipment, systems, and cables by a quick disconnection. They meet the requirements of UL 1077/CSA 22.2 No. 235 and are in conformity with IEC/EN 60 898, 60 947-2, and CCC GB 10963.

When following appropriate standards, these devices increase protection of energy loads such as controller I/O, solenoids, power supplies, and control transformers from damaging power surges.

### Accessory options:

- Auxiliary contacts
- Auxiliary/signal contacts
- Shunt trip
- Undervoltage release
- Lock-out attachment
- Commoning links for IEC applications
- Bus bars for US/Canadian applications

LISTEN.  
THINK.  
SOLVE.™

# Catalog Number Explanation

Supplementary Protectors/Miniature Circuit Breakers

1492 – SP 3 B 200 N  
*a* *b* *c* *d* *e*

<i>a</i>		<i>b</i>		<i>c</i>		<i>d</i>		<i>e</i>	
Energy Limiting Circuit Breaker		Number of Poles		Trip Characteristics		Current Rating		Switched Neutral	
SP	Screw Terminal	1	1-Pole	Magnetic Trip Range		Examples		N	(Optional)
		2	2-Pole	B	3-5 in	005 = 0.5 Amps			
		3	2-Pole	C	6-10 in	060 = 6.0 Amps			
				D	12-20 in	150 = 15 Amps			

## Specifications

Bulletin 1492-SP Series C

Trip Characteristic	B Curve	C Curve	D Curve
	Resistive or Slightly Inductive Loads	Inductive Loads	Highly Inductive Loads
	3...5 In	5...10 In	10...20 In
Current Range	1...63 A	0.5...63 A	0.5...63 A
Poles (18 mm)	1, 2, 3, 1 + N, 3 + N		

### Miniature Circuit Breaker

Approvals	IEC/EN 60 898 (VDE), IEC/EN 60 947-2 (GL), CE, CCC
Interrupt Rating 1 Pole	10 kA @ 240 VAC
Interrupt Rating Multi-Pole	10 kA @ 415 VAC

### Supplementary Protector

Approvals	UL 1077 Recognized Component QVNU2-E65133, CSA 22.2 No. 235 Certified Component	
Use Group (UG)	UG A General Industrial	
Terminals (FW)	FW 3 Line and Load Evaluated for Field Wiring	
Overload Rating (OL)	OL 0 General Use	
1 Pole, 1 Pole + N		
Max. Volts	277 VAC	48 VDC
Tripping Current (TC)	TC 1, 40°C	TC 1, 40°C
Short-Circuit Current Rating (SCCR)	SC U2	SC U1
< 35 A	10 kA @ 277 VAC B & C Curve 5 kA @ 277 VAC D Curve	10 kA @ 48 VDC B, C, and D Curve
40, 50, 63 A	5 kA @ 480Y/277 VAC B, C, & D Curve	
2 Pole, 3 Pole, 3 Pole + N		
Max. Volts	480Y/277 VAC	125 VDC (2-Pole Series)
Tripping Current (TC)	TC 2, 40°C	TC 2, 40°C
Short-Circuit Current Rating (SCCR)	SC U2	SC U2
< 35 A	10 kA @ 480Y/277 VAC B & C Curve 5 kA @ 480Y/277 VAC D Curve	10 kA @ 48 VDC B, C, and D curve
40, 50, 63 A	5 kA @ 480Y/277 VAC B, C, & D Curve	

## Accessories

### Bus Bars, Pin Style

Cutable, copper bus bar provided in 1 m length. UL 508 Listed, E56639, Category NMTR, cULus. CE to IEC 664 10 kA SCCR for use with 1492-SP. Bus bars may also be used with 1492-FB, Type CC and midget fuse holders.

Description	For Use With	Package Quantity	Devices Per Meter	Ampacity	Cat. No.
1-Phase Bus Bar	1492-SP1	(1) - 1 Meter Bus Bar	57	80 A	1492-A1B8
				100 A	1492-A1B1
	1492-SP1 with Auxiliary Contact Module		80 A	1492-A1B8H	
			100 A	1492-A1B1H	
2-Phase Bus Bar	1492-SP2		29	80 A	1492-A2B8
				100 A	1492-A2B1
	1492-SP2 with Auxiliary Contact Module		80 A	1492-A2B8H	
			100 A	1492-A2B1H	
3-Phase Bus Bar	1492-SP3		19	80 A	1492-A3B8
				100 A	1492-A3B1
	1492-SP3 with Auxiliary Contact Module		80 A	1492-A3B8H	
			100 A	1492-A3B1H	
End Cap for 1-Phase	—	10	—	—	1492-A1E
End Cap for 2 & 3-Phase	—	10	—	—	1492-AME
Protective Shroud	—	10	—	—	1492-AAP
Terminal Lug	—	10	—	80 A/100 A	1492-AAT1

Fork Style Commoning Links (For use with 1492-SP only. CE to IEC 664 only.)

May Be Cut to Length, Not for Use with Accessories

Type	No. of 1492-SP	Rated Operational $I_{e}$ End Feed per Phase	Rated Operational $I_{c}$ Center Feed per Phase ( $I_{c} \leq 63$ A)	Pieces per Package	Cat. No.
1-Pole	1 m (56 devices/m)	63	100	1	1492-ASPCL1
2-Pole	1 m (29 devices/m)	63	100	1	1492-ASPCL2
3-Pole	1 m (19 devices/m)	63	100	1	1492-ASPCL3
End Caps for 2 & 3-Pole	—	—	—	10	1492-ASPEC1

May Not Be Cut to Length, Not for Use with Accessories

Type	No. of 1492-SP	Rated Operational $I_{e}$ End Feed per Phase	Rated Operational $I_{c}$ Center Feed per Phase ( $I_{c} \leq 63$ A)	Pieces per Package	Cat. No.
1-Pole	2	63	100		1492-ASPCL102
1-Pole	6	63	100	20	1492-ASPCL106
1-Pole	12	63	100	20	1492-ASPCL112
2-Pole (1p + N)	2	63	100	10	1492-ASPCL204
2-Pole (1p + N)	3	63	100	10	1492-ASPCL206
2-Pole (1p + N)	6	63	100	10	1492-ASPCL212
3-Pole	2	63	100	10	1492-ASPCL306
3-Pole	4	63	100	10	1492-ASPCL312
4-Pole	2	63	100	5	1492-ASPCL408
4-Pole	3	63	100	5	1492-ASPCL412

### May Not Be Cut to Length, For Use with Accessories

Type	No. of 1492-SP	Rated Operational $I_{e, End}$ Feed per Phase	Rated Operational $I_{e, Center}$ Feed per Phase ( $I_e < 63$ A)	Pieces per Package	Cat. No.
1-Pole	2	63	100	20	1492-ASPCL1A02
1-Pole	6	63	100	20	1492-ASPCL1A06
1-Pole	9	63	100	20	1492-ASPCL1A09
2-Pole (1p + N)	2	63	100	10	1492-ASPCL2A04
2-Pole (1p + N)	3	63	100	10	1492-ASPCL2A06
2-Pole (1p + N)	5	63	100	10	1492-ASPCL2A10
3-Pole	2	63	100	10	1492-ASPCL3A06
3-Pole	4	63	100	10	1492-ASPCL3A12

### May Not Be Cut to Length, For Use with Multiple 1 Pole Each with Aux. Contact Module

Type	No. of 1492-SP	Rated Operational $I_{e, End}$ Feed per Phase	Rated Operational $I_{e, Center}$ Feed per Phase ( $I_e < 63$ A)	Pieces per Package	Cat. No.
—	2 x 3 (1p)	63	100	10	1492-ASPCL2AP06
—	2 x 3 (1p) + 2 (1p)	63	100	10	1492-ASPCL3AP08
—	3 x 3 (1p)	63	100	10	1492-ASPCL2AP09

### Incoming Terminals for Fork Style

Type	No. of 1492-SP	Rated Operational $I_{e, End}$ Feed per Phase	Rated Operational $I_{e, Center}$ Feed per Phase ( $I_e < 63$ A)	Pieces per Package	Cat. No.
For Max. 25 mm <sup>2</sup> Wire	—	—	100	50	1492-ASPCLT25
For Max. 35 mm <sup>2</sup> Wire	—	—	100	10	1492-ASPCLT35

### Protective Covers for Unused Forks

Type	No. of 1492-SP	Rated Operational $I_{e, End}$ Feed per Phase	Rated Operational $I_{e, Center}$ Feed per Phase ( $I_e < 63$ A)	Pieces per Package	Cat. No.
—	—	—	100	10 Sets (5/Set)	1492-ASPCLPS

See [www.ab.com](http://www.ab.com) for additional product information.

Allen-Bradley and Rockwell Software are trademarks of Rockwell Automation, Inc.

**[www.rockwellautomation.com](http://www.rockwellautomation.com)**

#### Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation, Vorstlaan/Boulevard du Souverain 36, 1170 Brussels, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846